

M ALPAIR 6

Rectangular

Classic smooth response small driver with full frequency range delivery.


Installation Guide



Specifications

IMP-NOMINAL	4.0OHM
REVC	3.6OHM
FO	74.0HZ
SD	3.8KMM ²
VAS	3.3LTR
CMS	1.6MM/N
MMD	2.8G
MMS	2.93G
BL	2.87TM
QMS	2.5
QES	0.6
QTS	0.48
LEVC	62.55UH
NO	0.21%
SPLO	86.0DB
XMAX(1WAY)	5.0MM
POWER	15WATTS CONT 30WATTS MAX

— Frequency Response
— Impedance
- - - 30 Degree Off Axis Response

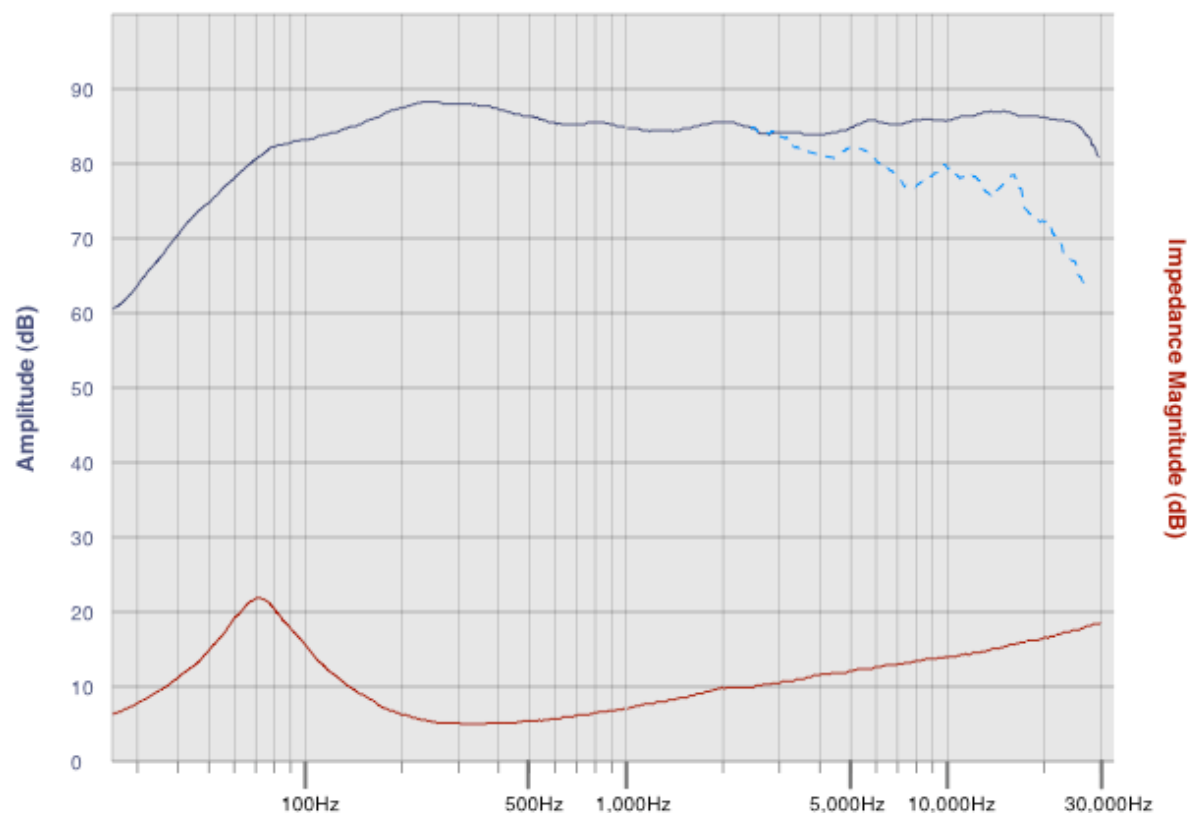

ALPAIR 6

Installation Guide



Rectangular

Classic smooth response small driver with full frequency range delivery.

