


4" TI FULL RANGE

- FULL RANGE FREQUENCY RESPONSE
- HIGH POWER LOADING DESIGN
- DIE CAST BASKET, TITANIUM COLOR PAINTED, VC VENTED DESIGN
- TITANIUM CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED
- NEODYMIUM DESIGN, UNDERHUNG MOTOR DESIGN
- LOW 2nd, 3rd DISTORTION DESIGN

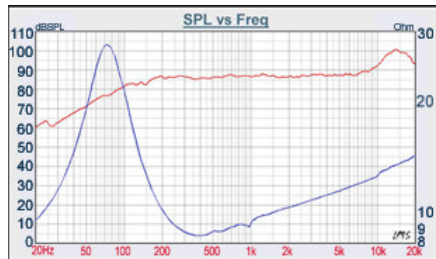

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

DIAPHRAGM MTL	Titanium
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6.8 W
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	70-20K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.37 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	4.61 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1053MN ⁻¹
EFFEC.PISTON AREA	0.0057M ²
Levc	0.015mH
Zo	28ohm
X-max	3 mm
Vas	4.86 Litr.
Qts	0.37
Qms	1.51
Qes	0.49

CLOSE