



WF SERIES

W4-1658SB

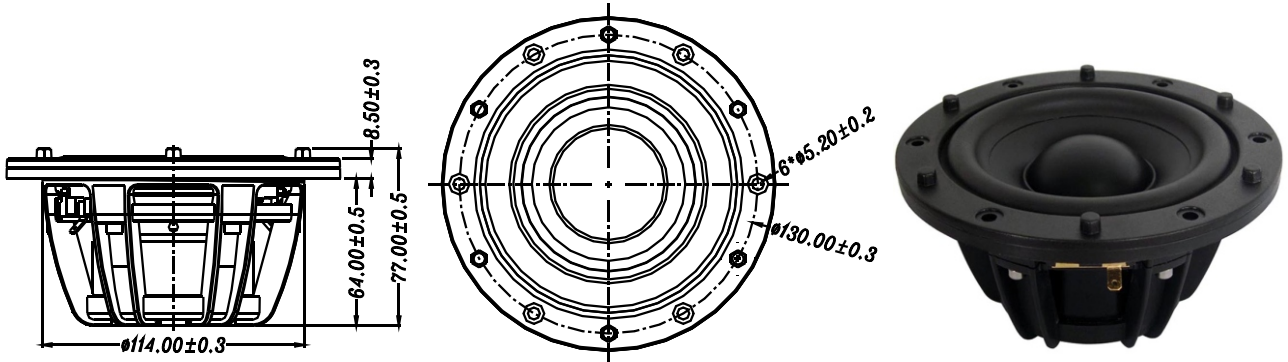

- LONG THROW, HIGH POWER LOADING, $X_{max} = 4.5\text{mm}$
- ENGINEERING PLASTIC OF NY66 FOR BASKET, IT'S TOUGH, STRONG AND EXCELLENT DIMENSION STABILITY
- UNIQUE CONE /DUST CAP,BASKET DESIGN TO ENSURE THE CONSISTENCY OF QUALITY
- ALUMINUM BASKET PANEL

4.5" PP MIDBASS

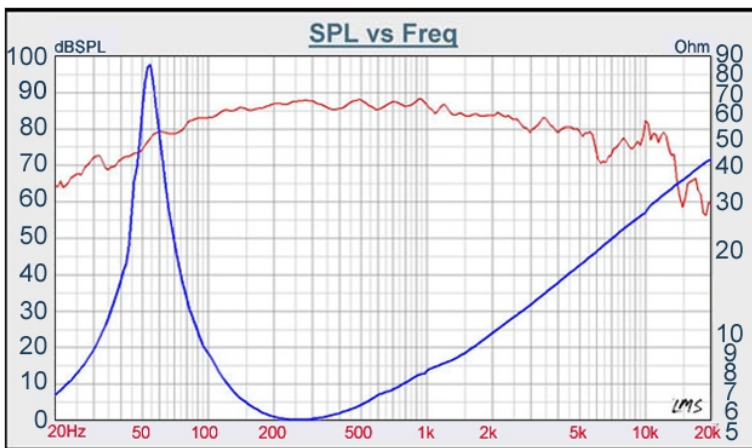

| | |
|-----------------------|--------------------------|
| DIAPHRAGM MTL | PP |
| SURROUND MTL | Rubber |
| NOMINAL IMPEDANCE | 4 Ω |
| DCR IMPEDANCE | 3.8 Ω |
| SENSITIVITY 1W/1M | 87 dB |
| FREQUENCY RESPONSE | 55Hz-6 K Hz |
| FREE AIR RESONANCE | 55 Hz |
| VOICE COIL DIAMETER | 49.5 mm |
| AIR GAP HEIGHT | 6 mm |
| RATED POWER INPUT | 45 W |
| MAXIMUM POWER INPUT | 90 W |
| FORCE FACTOR, BL | 5.62TM |
| MAGNET WEIGHT (oz) | Neodymium |
| MOVING MASS | 9.98 g |
| FERROFLUID ENHANCED | No |
| SUSPENSION COMPLIANCE | 847.548 MN ⁻¹ |
| EFFECTIVE PISTON AREA | 0.00785 M ² |
| Levc | 0.144 mH |
| Zo | 85 ohm |
| Xmax | 4.5 mm |
| Vas | 7.42 Litr |
| Qts | 0.39 |
| Qms | 8.84 |
| Qes | 0.41 |

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com