
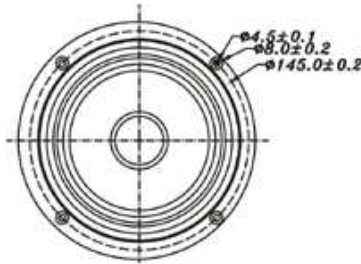


PM SERIES

W5-704D

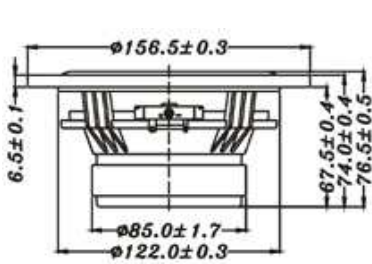

5" PPM WOOFER

- TWIN ROLL RUBBER SURROUND
- EXTREMELY LINEAR EXCURSION DESIGN
- PPM CONE WITH TWIN ROLL SHAPE RUBBER SURROUND
- DIE CAST BASKET, PPM PHASE PLUG
- INTENDED FOR BASS REFLEX ENCLOSURES
- VENTED POLE PIECE
- DURABLE CONEX SPIDER



DIAPHRAGM MTL	PPM
SURROUND MTL	Twin Roll Rubber
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6 W
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	55-9K Hz
FREE AIR RESONANCE	55 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	28 W
MAXIMUM POWER INPUT	56 W
FORCE FACTOR, BL	6.17 TM
MAGNET WEIGHT (14.4 oz)	409 g
MOVING MASS	7.98 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	922.088 μMN^{-1}
EFFEC.PISTON AREA	0.0094 m^2
Levc	0.063 mH
Zo	33 ohm
X-max	3.3 mm
Vas	11.57 Litr.
Qts	0.38
Qms	2.07
Qes	0.46



VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

CLOSE